




MODEL SV60 E BC

Full black module

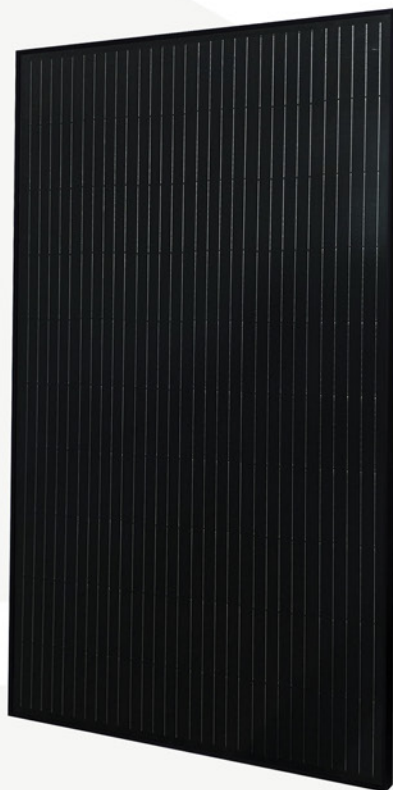

Premium quality



Power output
range 320-330 Wp



100% EL testing



Mechanical load
up to 5400 Pa



Low weight



Module efficiency
up to 19,88 %



Positive power
tolerance -0/+4,9 W



Made in Europe



IEC EN 61215
IEC EN 61730-1, -2



IEC EN 62716 Ed.1



IEC EN 61701



IEC TS 62804-1
(PID resistance)

Warranty:

10

years manufacturing defects

12

years limited,
90% output power

25

years limited,
80% output power



Electrical parameters at Standard Test Conditions (STC)				
MODEL		SV60-320 E BC	SV60-325 E BC	SV60-330 E BC
Peak power P_{MPP}	[W]	320	325	330
Peak power tolerance	[W]	-0/+4,9		
Short circuit current I_{SC}	[A]	9,80	9,84	9,90
Open circuit voltage V_{OC}	[V]	40,80	40,98	41,04
Rated current I_{MPP}	[A]	9,38	9,46	9,59
Rated voltage V_{MPP}	[V]	34,10	34,34	34,40
Current and voltage tolerance	[%]	± 3		
Module efficiency	[%]	19,28	19,58	19,88

STC: 1000W/m² irradiance, 25 °C cell temperature, AM1, 5 g spectrum according to EN 60904-3
 Average relative efficiency reduction of 3,4 % at 200 W/m² according to EN 60904-1

Electrical parameters at Nominal Operating Cell Temperature (NOCT)				
MODEL		SV60-320 E BC	SV60-325 E BC	SV60-330 E BC
Peak power P_{MPP}	[W]	233,5	236,8	240,6
Peak power tolerance	[W]	-0/+4,9		
Short circuit current I_{SC}	[A]	7,87	7,90	7,95
Open circuit voltage V_{OC}	[V]	37,5	37,7	37,7
Rated current I_{MPP}	[A]	7,53	7,59	7,69
Rated voltage V_{MPP}	[V]	31,0	31,2	31,3

NOCT: module operating parameters at 800 W/m² irradiance, 20 °C ambient temperature, 1 m/s wind speed

MECHANICAL DATA	
Dimensions (H x W x D)	[mm] 1660 x 1000 x 35
Weight	[kg] 18,9
Solar cells	60 cells, monocrystalline Si (PERC), 157 x 157 mm +/- 2mm
Cells encapsulation	Ethylene vinyl acetate (EVA)
Front	Tempered solar glass, 3,2 mm
Back	Composite polyester Film
Frame	Anodized aluminium frame with twin-wall profile and drainage holes
Junction box	IP67 with 3 Bypass diodes,
Cable and connectors	Solar cable 4 mm ² , length 1200 mm

NOTE: For extended models, SV60 E YYY, voltages and currents can vary where YYY is optional based on the chosen YYY variant (YYY = letter(s), F for black frame, B for silver frame and black backsheet, BC for full black module)

OPERATING CONDITIONS		
Temperature range	[°C]	-40 to +85
Maximum system voltage	[V]	1000
Max. series fuse rating		15A
Limiting reverse current		15A
Maximum surface load capacity		5400 Pa (Snow load)
Resistance against hail		Max. diameter of 25 mm with impact speed 23 m/s

THERMAL CHARACTERISTICS		
Temperature coefficient of P_{MPP}	[%/K]	-0,42
Temperature coefficient of I_{SC}	[%/K]	0,05
Temperature coefficient of V_{OC}	[%/K]	-0,33

